


Surface Mount

1. Decide mounting location.
2. Use mounting foam pad as guideline and drill holes.
3. Secure lighthouse with supplied screws.

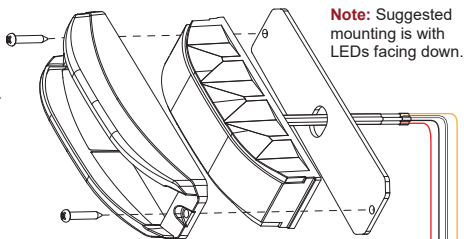

Note: Suggested mounting is with LEDs facing down.

OPERATIONS

To +VDC (fuse @ 2A).....**RED**

To Chassis Ground.....**BLACK**

For Simultaneous or Alternating Flash.....**WHITE**

Group1 Heads: (Wiring-**WHITE** connected to **RED**) will flash together

Group2 Heads: (Wiring-**WHITE** not connected to **RED**) will flash together

Group1 Heads will alternate with Group2 Heads

For Synchronization & Flash Patterns.....**YELLOW**

Connect **YELLOW** wires of all heads together for synchronization

*All heads must be set at the same pattern

Momentarily apply + VDC to **YELLOW** wire:

- once for next pattern
- quickly three times for FP#1

Note: This unit may not be factory set at pattern 1.

| FP# | Flash Patterns | | |
|-----|----------------|----|---------------------|
| 1 | Single (2Hz) | 9 | Double |
| 2 | Double (R65) | 10 | Triple |
| 3 | Triple (2Hz) | 11 | Quad |
| 4 | Quad (2Hz) | 12 | Quint |
| 5 | Random | 13 | 8 Flash |
| 6 | Steady | 14 | Single-Quad |
| 7 | Single | 15 | Single H/L |
| 8 | Mega | 16 | Single-Triple-Quint |